



Manual for the Feathering Propeller

DF-128

3 and 4 blade model

Installation on the shaft	page 2
Operation	page 3
Pitch adjustment LH (left-hand rotation propeller)	page 4
Pitch adjustment RH (right-hand rotation propeller)	page 5
Defining and checking adjustments	page 6
Removing from the shaft	page 7
Servicing	page 8
Torque settings prop-nut	page 9

INSTALLATION on the shaft


The VARIPROP is delivered assembled, greased and ready for installation.

He may not be disassembled, otherwise the warranty claim goes out!


Before fitting the VARIPROP onto the shaft, check key and keyway in the propeller hub. Take care that the key is the proper dimension and that the hub slides completely onto the shaft (see below). Remove the zinc anode (2) and the nut (4). Fit the propeller onto the shaft strongly. Tighten the nut (4) with LOCTITE low (pink) onto the shaft (torque-setting see page 9) and secure it with the lock pins (3). Fit the anode (2).

Make sure that the propeller is always protected from electrolytic corrosion by changing the anode (2) latest every year! May not be necessary in freshwater.

After the VARIPROP has been fitted properly check that the blades rotate freely from the forward stop to the reverse stop. The shock absorber function can be felt ! See servicing page 8.

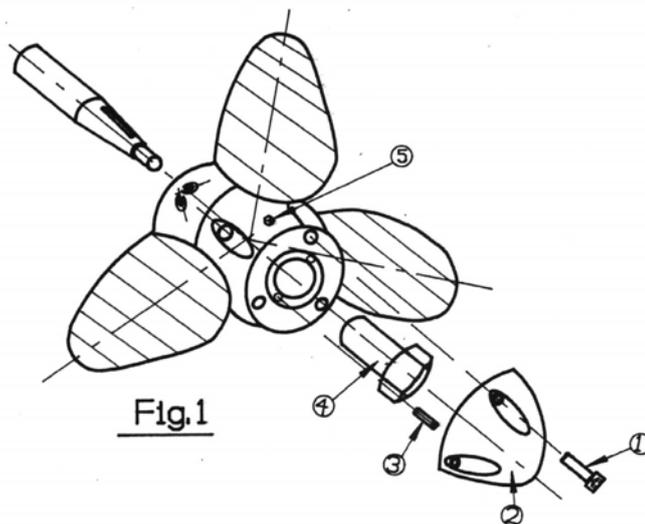


MOUNTING: First slide the prop on the shaft without key. Mark the shaft with a grease-pen at the prop end. After tightening the shaft nut very strongly (torque-setting see page 9) the mark must disappear. If not, the key is binding and the top or the sides of the key must be filed down. Light must be shining through on the top of the key when looking into the hub from astern. You may have to move your eye vertically to see it.

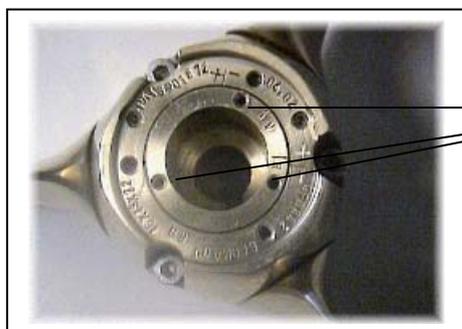

Only two of the three lock-pin holes can be used, depending on the final position of the shaft-nut flange.

Carefully align the lock-pins (3) straight. They must go in easily. If not, try first to tighten the propnut a little further until they do. If impossible, back off the nut a little. The lock-pins should be hand tightened only. If overtightened they may strip.

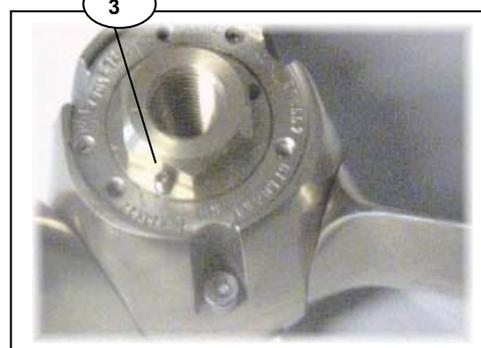

ATTACHING THE ZINC-CONE:

First, insert all three zinc-cone screws (1) loosely, then tighten securely in succession. Use LOCTITE low (pink) and observe the little washers. They prevent the grease from squeezing out of the hub during operation. Be sure to clean the screws and screw-holes from any grease before applying the loctite.

ENGINE DRY TEST:

Please consider that a dry test of the engine **MUST NOT** be done while the VARIPROP is fitted onto the shaft ! The VARIPROP needs water pressure on the blades, otherwise the prop could be damaged !!

OPERATION

The VARIPROP feathers automatically when the shaft rotation is stopped. After engine start-up and shifting into gear the blades will engage in either forward or reverse.

THE BEST WAY TO FEATHER THE PROPELLER IN THE SAILPOSITION IS:

VARIPROP sailposition with mechanical gear-box:

- Power at 3 to 4 knots in forward.
- **Stop the engine** and engage the transmission in reverse to stop the freewheeling of the shaft.

VARIPROP sailposition with hydraulic transmission:

- Power at 3 to 4 knots in forward.
- Stop the engine while still engaged in forward. The remaining oil pressure of the transmission will stop spinning the shaft to feather the blades in the sailposition.

If the propeller is not feathered in the sailposition the shaft will freewheel like with a fixed propeller.

In that case start the engine again and repeat the steps above.

Once the prop is feathered , it is better to shift the transmission to neutral.

DO NOT stop the engine while it turns in reverse. In this case the blades will stay in the reverse position and will not feather. You can actually use this feature to drive a shaft generator.

Please note that 98% of our delivered VARIPROP propellers for hydrolic gear boxes feather into sailing position without a shaft lock as you turn off the engine with forward gear still clutched in. This procedure generates higher oil pressure and prevents shaft rotation. This small-scale friction is usually enough to feather the propeller instantly into sailing position. If this procedure does not work, you most likely need to fit a shaft lock. For large yachts, equipped with a propeller from our VARIPROP XLS range, we highly recommend to fit a shaft lock to ensure the propeller feathers and stays in sailing position.

TROUBLE SHOOTING: If the propeller does not work in forward or reverse go systematically through the points below:

- Check low idle of the engine. It should be 800 to 900 rpm in idle.
- Check shifting movement of the transmission lever. Make sure that the shifting travel is not too short. The amount of lever travel, as measured at the pivot point of the actuating lever, between the neutral position and end positions for forward and reverse can be found in the owners manual of your transmission. A larger amount of lever travel is in no way detrimental.
- Check the clutch discs of the transmission. They could be worn out.

WARNING: It is important to follow the instructions below carefully so as to avoid excessive load and shock to the gears, shortening their life.

- When going from ahead to astern or the opposite, it is necessary to idle down and shift at low rpm's (max.1200rpm) between gears to allow smooth reversing of rotation without binding. This will substantially lengthen the service life of your propeller gears.
- When going from ahead to astern or the opposite, you can hear the turning-noise of the feathering blades. This is normal and not a problem or a defect of your VARIPROP.
- The propeller body must always be completely filled with a high viscosity grease. We recommend synthetic grease typ TW.2 GEL or mineral multi-purpose grease EP/SAL 8 (see servicing page 9)
- The propeller must be protected from electrolytic corrosion by fitting the usual zinc anodes on the shaft plus the prop anode. We recommend the replacement of the anode once a year.
- If you want to protect your VARIPROP with Antifouling, use only Antifouling which needs a primer first. Otherwise chemical interaction and decomposition could occur. Our recommendation is *Velox TF plus* including a primer (offers also protection against electrolyses), available from your VARIPROP distributor.

Never dismantle the VARIPROP yourselves !!

Disassembly and reassembly require special tools and technical know-how only available at the factory or their approved service centres.

PITCH ADJUSTMENT „LH“

GERNAL: The pitch adjustment is very simple on the VARIPROP, and can be done in or out of the water in a matter of few minutes, if there is enough space between propeller hub and strut to fit an allen key into the set screws (1) & (3) at Foto below, right side. If not, the propeller must first be pulled. (see removing from the shaft)

Propeller in the drawing below (Fig.2) is for a left hand rotation VARIPROP LH.


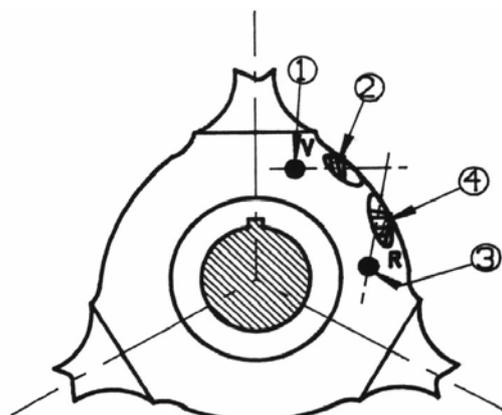


Fig.2

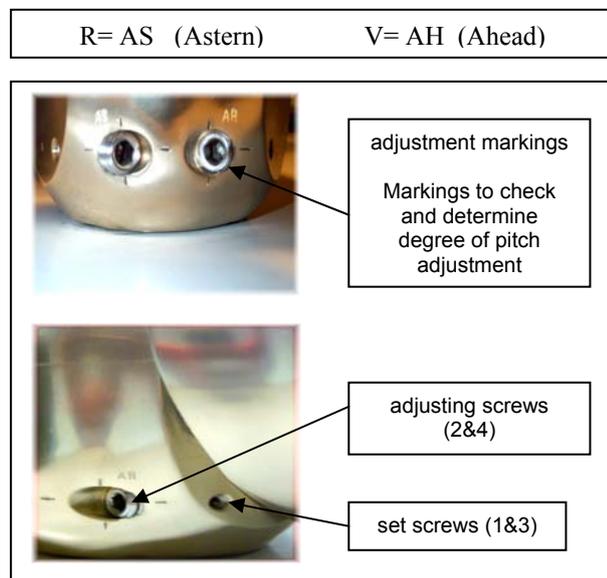


The following description refers to the view towards astern for a **left hand VARIPROP**.

A. Adjusting the forward pitch:

1. Remove the set screw (1, behind the blades). Use the 4mm Allen key supplied with the prop.
2. Turn the adjusting screw (2) which is marked as "AH" or "V" with the 6mm Allen-key as follows:

2a. Increasing of pitch approx. 3" max.:



- Turn the adjusting screw (2) clockwise. (see "NOTE" and page 6)
- Secure set screw (1) with LOCTITE low (pink) Lock set screw strongly.

2b. Reducing of pitch approx. 2" max.:



- Turn the adjusting screw (2) anti-clockwise. (see "NOTE" and page 6).
- Secure set screw (1) with LOCTITE low (pink)
- Lock set screw strongly.

B. Adjusting the reverse pitch:

1. Remove the set screw (3, behind the blades). Use the 4mm Allen-key supplied with the prop.
2. Turn the adjusting screw (4) which is marked as "AS" or "R" with the 6mm Allen-key as follows:

2a. Increasing of pitch approx. 2" max.:



- Turn the adjusting screw (4) anti-clockwise. (see "NOTE" and page 6)
- Secure set screw (3) with LOCTITE low (pink) Lock set screw strongly.

2b. Reducing of pitch approx. 3" max.:



- Turn the adjusting screw (4) clockwise. (see "NOTE" and page 6).
- Secure set screw (3) with LOCTITE low (pink).
- Lock set screw strongly.

NOTE: It is quite possible to set the pitch continuously variable and independently for forward and reverse. Turning of the adjusting screws (2) & (4) by quarter a revolution (90°) changes the pitch approx. 1". This will change the engine revolution by approx.200.

PITCH ADJUSTMENT „RH“

GERNAL: The pitch adjustment is very simple on the VARIPROP, and can be done in or out of the water in a matter of few minutes, if there is enough space between propeller hub and strut to fit an Allen key into the set screws (1) & (3) at Foto below, right side. If not, the propeller must first be pulled. (see removing from the shaft)

Propeller in the drawing below (Fig.3) is for a **right hand** rotation **RH**.

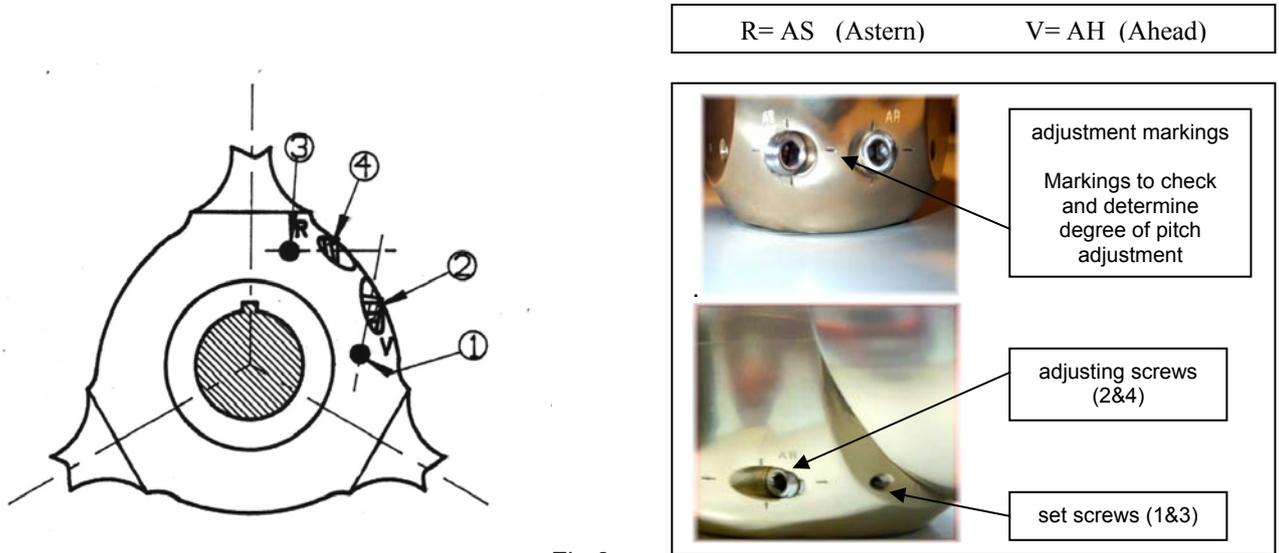



Fig.3

The following description refers to the view towards astern for a **right hand VARIPROP**.

A. Adjusting the forward pitch :


1. Remove the set screw (1, behind the blades). Use the 4mm Allen key supplied with the prop.
2. Turn the adjusting screw (2) which is marked as **“AH”** or **“V”** with the 6mm Allen-key as follows:

2a. Increasing of pitch approx. 3“ max.:



- Turn the adjusting screw (2) clockwise. (see “NOTE” and page 6)
- Secure set screw (1) with LOCTITE low (pink).
- Lock set screw strongly.

2b. Reducing of pitch approx. 2“ max.:




- Turn the adjusting screw (2) anti-clockwise. (see “NOTE” and page 6).
- Secure set screw (1) with LOCTITE low (pink).
- Lock set screw strongly.

B. Adjusting the reverse pitch :

1. Remove the set screw (3, behind the blades). Use the 4mm Allen key supplied with the prop.
2. Turn the adjusting screw (4) which is marked as **“AS”** or **“R”** with the 6mm Allen-key as follows:

2a. Increasing of pitch approx. 2“ max.:



- Turn the adjusting screw (4) anti-clockwise. (see “NOTE” note and page 6)
- Secure set screw (3) with LOCTITE low (pink).
- Lock set screw strongly.

2b. Reducing of pitch approx. 3“ max.:



- Turn the adjusting screw (4) clockwise. (see “NOTE” and page 6).
- Secure set screw (3) with LOCTITE low (pink).
- Lock set screw strongly.

NOTE: It is quite possible to set the pitch continuously variable and independently for forward and reverse. The turning of the adjusting screws (2) & (4) by quarter a revolution (90°) changes the pitch approx. 1“. This will change the engine revolution by approx. 200.

Defining and checking pitch adjustments


It is quite possible to set the pitch continuously variable and independently for forward and reverse. The turning of the adjusting screws (2) & (4) in Figure 2 & 3 (see pages 4&5) by quarter a revolution changes the pitch approx. 1". That means a half turn (180°) changes the pitch by 2" etc..

For a check of pitch adjustments there are markings on the hub face under the zinc anode.

To return to original factory pitch settings, line up "AH" or "V" resp. "AS" or "R" markings on the hub face.

Example:

check adjustments ahead

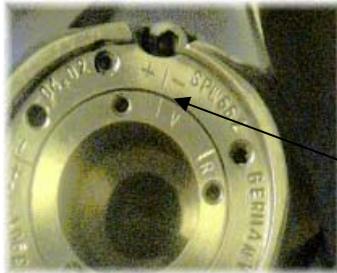

markings
line up

original factory pitch setting
ahead


inner marking has moved

plus



pitch has been increased ahead

check adjustments astern

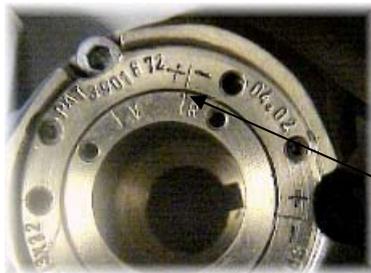

markings
lined up

original factory pitch setting
astern

inner marking has moved

minus




pitch has been decreased astern

Note :

- If the engine does not reach the desired RPM reduce the pitch.
- If the engine exceeds the desired RPM increase the pitch.
- 1" of pitch reduction / increase results in approx. 200 engine revolutions increase / reduction.

VARIPROP REMOVAL


- 1.) In order to remove the VARIPROP you must first remove the zinc anode (2).
- 2.) Remove both lock pins (3) and the prop nut (4)

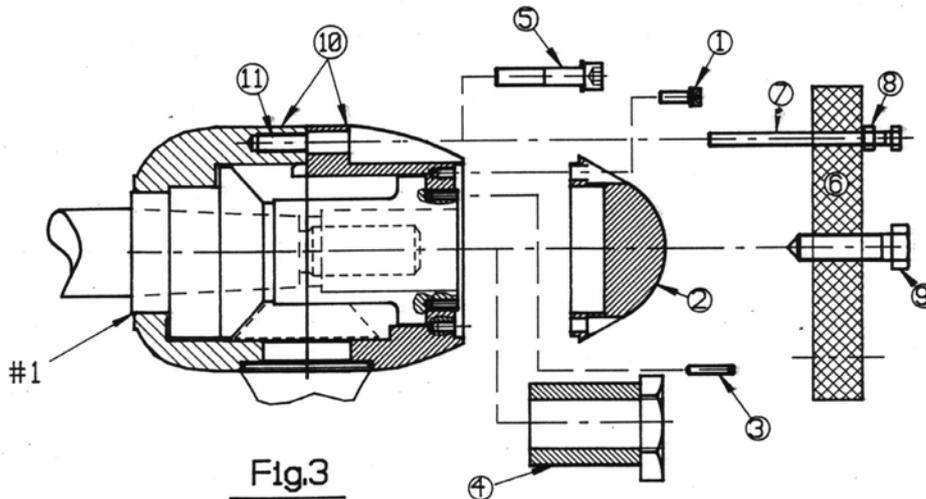

- 3.) Then remove at first only two hexagonal socket screws (5). **DO NOT OPEN ALL !**
- 4.) Fit two of the long hexagonal head screws (7) into the outer bolt circle diameter of the puller (6). Now fit the SPW puller (6) onto the aft of the rear boss and screw the long hexagonal head screws (7) completely into the screw holes (11) of the front boss half (10). Tighten the nut (8) on the head screws (7) until the plate (6) is fitted snugly and evenly to the aft boss.

CAUTION: Do not dismantle the two separate halves of the Variprop hub !!!

In this mode remove the last hexagonal socket screw (5) as well and fit the third long hexagonal head screw. Take care that plate (6) will fit snugly and evenly to the aft boss.

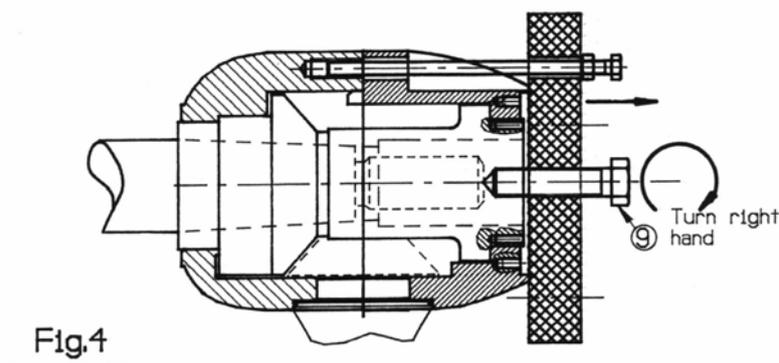

- 5.) Now turn the hexagon head bolt (9) against the end of shaft until the VARIPROP comes off the taper. Never use a hammer to remove the prop from the taper !!!
- 6.) At the end remove the puller (6) carefully and secure the boss halves (10) with the socket screws (5). Tighten strongly with LOCTITE blue (medium). Take care that the hub halves do not come apart when removing the hexagonal head screws (7).

We highly recommend the use of above described special puller, available from your VARIPROP dealer. Standard 3-prong pullers can easily slip and damage the rounded VARIPROP housing !

SERVICING

The VARIPROP needs to be greased a minimum of once a year. The VARIPROP body should always be completely filled with a high viscosity **grease** of a hydrophobic nature. Remove the cap screw (5) and screw in the lubricating nipple which is supplied with the tools. Further remove the zinc anode ! With each pump of the grease gun rotate the propeller from forward stop to reverse stop to allow the grease to work through the propeller. Stop to pump when enough grease comes out of the anode drill holes on top of the prop (Fig.8).

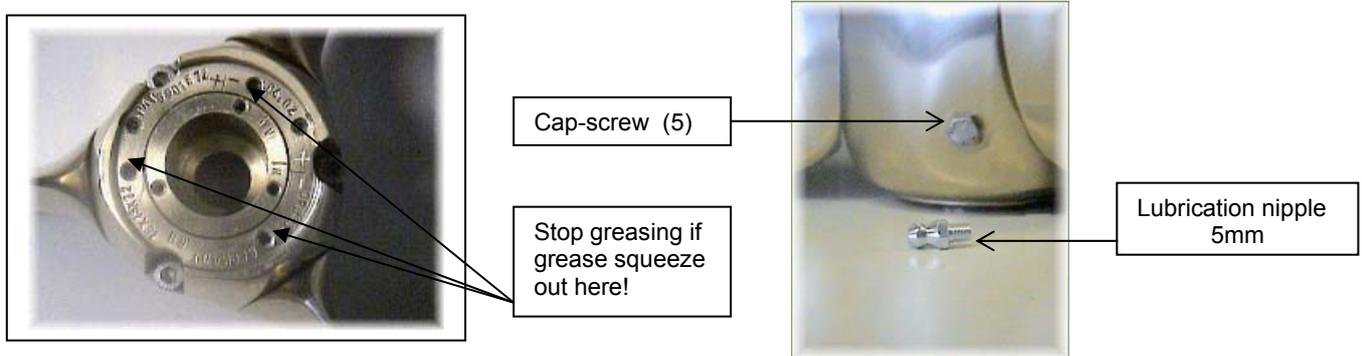


Fig.8

Factory supplied special grease EP/SAL is recommended and available from your VARIPROP distributor.
Avoid regular white grease (sterntube-grease) !

Shock-absorber: The integrated shock-absorber reduces unpleasant operating noises. The pitch stops are substantially protected against wear. At rotating the blades by hand, you can feel the shock-absorber function. This “heavy” turning at the absorber area is normal and necessary for the function !

Make sure that you always keep the zinc anode in good condition. The Variprop must be protected by a lot of zinc, so also use a zinc anode onto the shaft if possible. Use fine sandpaper to clean the aft of the end boss and the forward face of the VARIPROP-anode to give the zinc good contact with the propeller.

Tools supplied with each VARIPROP DF-128:

- 1x small plastic bottle with Loctite low (pink)
- 1x grease nipple 5mm
- 1x allen key 3mm 1x allen key 4mm
- 1x allen key 5mm 1x allen key 6mm
- 1x allen key 8mm

necessary tools for pitch adjustment

- 1x allen key 4mm
- 1x allen key 8mm

necessary tools for removing the VARIPROP DF-128

- 1 open-end- / box spanner 17mm 1 allen key 3mm
- 1 open-end- / box spanner 24mm 1 allen key 5mm
- 1 open-end- / box spanner 50mm 1 allen key 6mm

Torque settings for the prop-nut

(page2, Fig.1, part-no.4)

Standard – thread

M 14 x 2 UNC 1/2 “-13	40 Nm / 30 ft/lb
--------------------------	------------------

M 16 x 2 BSW 5 / 8 “ – 11 UNC 5 / 8 “ - 11	60 Nm / 45 ft/lb
--	------------------

M 20 x 2,5 BSW 3 / 4 “ – 10 UNC 3 / 4 “ - 10	125 Nm / 95 ft/lb
--	-------------------

UNC 7 / 8 “-9	160 Nm / 115 ft/lb
---------------	--------------------

M 24 x 3 BSW 1 “ - 8 UNC 1 “ - 8	210 Nm / 155 ft/lb
--	--------------------

M 27 x 3	315 Nm / 230 ft/lb
----------	--------------------

M 30 x 3,5 UNC 1 1/8” - 7 BSW 1 1/8” - 7	350 Nm / 255 ft/lb
--	--------------------

UNC 1 1/4” “- 7	350 Nm / 255 ft/lb
-----------------	--------------------

UNC 1 1/2” - 6	390 Nm / 290 ft/lb
----------------	--------------------

Fine - thread

M 14 x 1,5 BSF 1/2 “ - 16	40 Nm / 30 ft/lb
------------------------------	------------------

M 16 x 1,5 BSF 5 / 8 “ – 14 UNC 5 / 8 “ - 18	70 Nm / 50 ft/lb
--	------------------

M 20 x 1,5 BSF 3 / 4 “ – 12 UNC 3 / 4 “ - 16	135 Nm / 100 ft/lb
--	--------------------

M 24 x 2 BSF 1 “ - 10 UNF 1 “ - 12	225 Nm / 165 ft/lb
--	--------------------

M 30 x 2	430 Nm / 315 ft/lb
----------	--------------------

M 36 x 3	490 Nm / 360 ft/lb
----------	--------------------

SUBJECT TO TECHNICAL ALTERATIONS; ERRORS and MISPRINTS